


# Technical Data Sheet

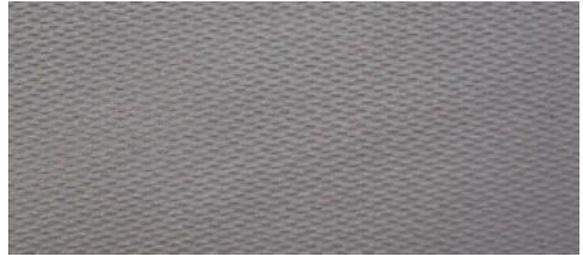

Description	<b>Marine glass fabric, one side coated with a flame retardant, chemical resistant silicone rubber coating.</b>			
Applications	- Insulation mattresses		- Welding shields	
	- Smoke curtains		- Valve Jackets -Expansion Joints	
Approvals				
<b>Characteristics of Thermaltex 430/SG1</b>				<b>Test method</b>
Total weight	g / m <sup>2</sup>	510	± 5%	DIN 53854
Width (std)	mm	1000	± 15	DIN 53851
Thickness	mm	0.50	± 0.02	ISO 4603
Roll length (std)	m	50		
Max. application temperature	°C	250		
Remarks				

Fabric structure				
	Unit	Data	Tolerance	Test method
<b>Base fabric</b>		E-Glass C-Glass		
Weight	g / m <sup>2</sup>	430	± 5%	DIN 53854
Weave		Twill 1/3		
Setting	per cm	19.0 x 11.0	± 3%	DIN 53853
Warp	Tex	EC9-68 S x 2	± 5%	DIN 60850 T.2
Weft	Tex	EC9-68 S x 2	± 5%	DIN 60850 T.2
Tensile strength (warp x weft)	N/cm	860 x 500		DIN 53857
<b>Coating / Finish</b>		Silicone (silver-grey)		
Weight	g / m <sup>2</sup>	80	± 5%	DIN 53854
1 or 2 sided		1		